

SA-1802-S/SA-3202-S


Eco Solvent Printer (With 2 Heads)




Eco Solvent Ink



Two DX5 Heads

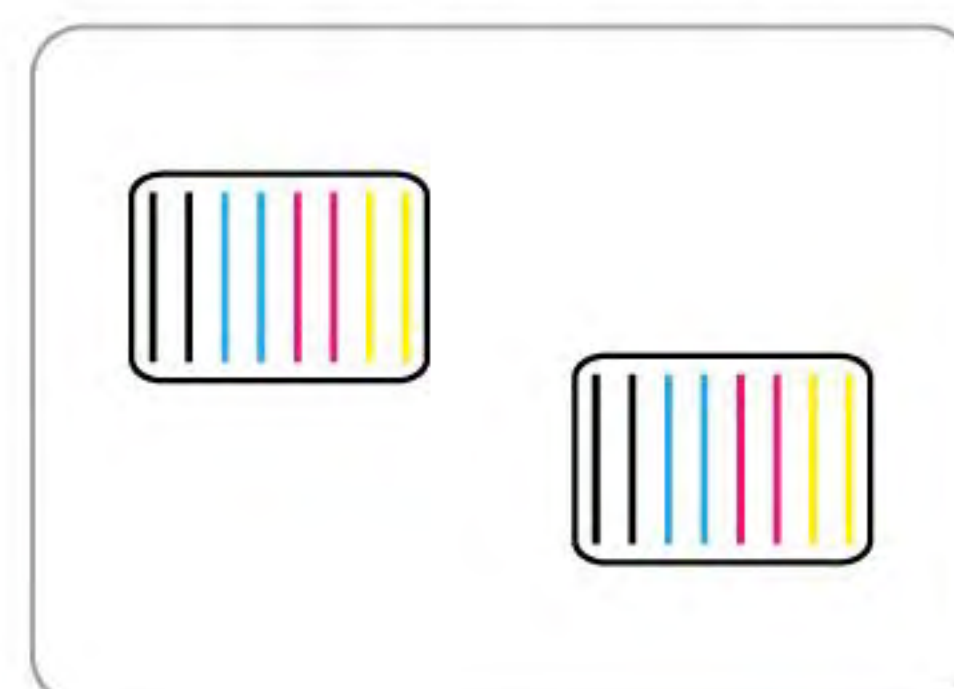

Two I3200 Heads

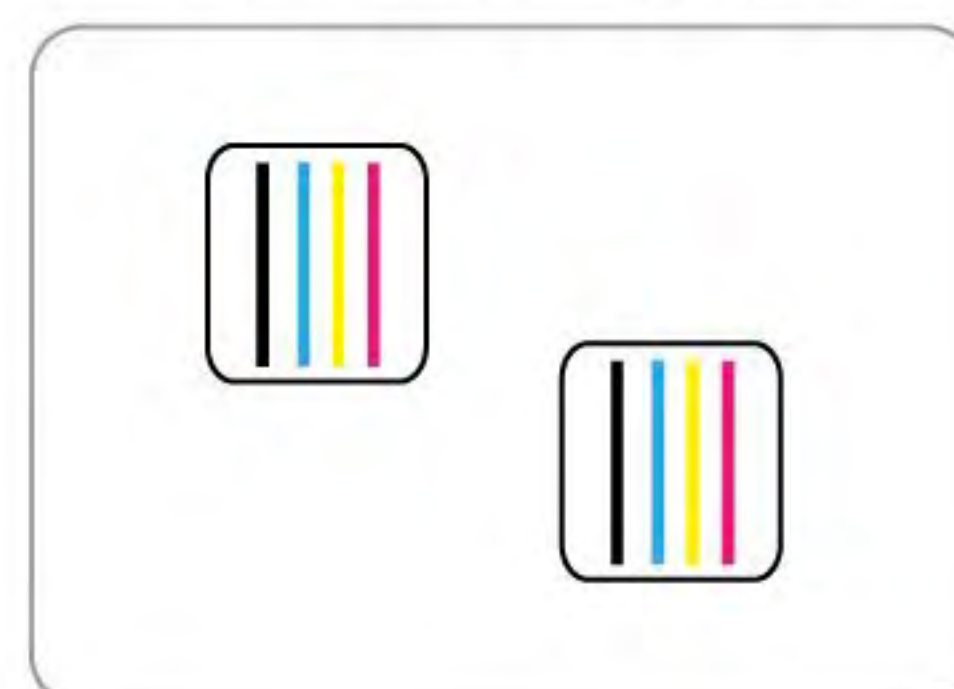

* 1.8m Dual I3200 Print Heads Speed

360x1800dpi - 3pass	55 m ² /h
720x1200dpi - 4pass	40 m ² /h
720x1800dpi - 6pass	27 m ² /h

Our range of wide format inkjet printers matches our knack for engineering and quality with your desire for impeccable performance and careless production. You can produce roll-to-roll indoor prints and long term outdoor signs. Wide applications in light box posters, customized car stickers, background wall cloth, label printing, advertising sign, subway advertising, shopping mall advertising signs etc.




● Technical Specifications

Model	SA1802-S(DX5)	SA1802-S(I3200)	SA3202-S(DX5)	SA3202-S(I3200)	
Print Head	Dual DX5 Print Heads	Dual I3200 Print Heads	Dual DX5 Print Heads	Dual I3200 Print Heads	
Printing Technology	Piezoelectric Inkjet				
Acceptable Media	Width	71.6 in.(1820 mm)		128 in.(3250 mm)	
	Thickness	Maximum 59 mil(1.5 mm)		Maximum 59 mil(1.5 mm)	
	Weight	132.2 lb.(60 kg)		176 lb.(80 kg)	
Printing Width	70.8 in.(1800 mm)		126 in.(3200 mm)		
Ink Cartridges	Type	Eco Solvent Ink			
	Capacity	4*4 CISS (220ml ink cartridge with 1.5L ink tank) 6*6 CISS (6 color), 8*8 CISS (8 color) optional			
	Color	4 colors (Cyan, Magenta, Yellow, Black) 6 colors, 8 colors optional			
Printing Resolution	Maximum 1440 dpi	Maximum 2400 dpi	Maximum 1440 dpi	Maximum 2400 dpi	
Printing Speed	4pass(720x720dpi): 333 sqft (31 sqm/h)		3pass(360x1800dpi): 590 sqft (55 sqm/h)		
	6pass(720x1080dpi): 225 sqft (21 sqm/h)		4pass(720x1200dpi): 429 sqft (40 sqm/h)		
	8pass(720x1440dpi): 182 sqft (17 sqm/h)		6pass(720x1800dpi): 290 sqft (27 sqm/h)		
Media Heating System	Intergrated post heater & Infrared Dryer & Fan system				
Interface	USB 2.0	USB 3.0/LAN	USB 2.0	USB 3.0/LAN	
Power Supply	AC 220V ± 10%, 50/60 HZ				
Dimensions(with stand)	126(W)x26(D)x53(H) in.		82(W)x38(D)x61(H) in.		
	(3190(W)x650(D)x1360(H) mm)		(4620(W)x970(D)x1560(H) mm)		
Weight(with stand)	882 lb. (400 kg)		1102 lb. (500 kg)		
Package Dimensions	Entirety Packing : 3360(W)x950(D)x1560(H) mm		186(W)x45(D)x69(H) in.		
	Split Packing : 3350(W)x820(D)x1030(H) mm		(4740(W)x1140(D)x1750(H) mm)		
Package Weight	Entirety Packing : 1102.5 lb. (500 kg) Split Packing : 1058.4 lb. (480 kg)		1433 lb. (650 kg)		
Environment	Power on	Temperature: 59 ℉ to 90 ℉ [15℃ to 32℃] (68 ℉ [20℃] / Humidity: 35 to 80% (no condensation)			
	Power off	Temperature: 41 ℉ to 104 ℉ [5℃ to 40℃] / Humidity: 20 to 80% (no condensation)			
Accessories	USB cable, media clamp, manual, drain bottle, ink cartridges, RIP software, etc.				




THK high-precision mute rail.

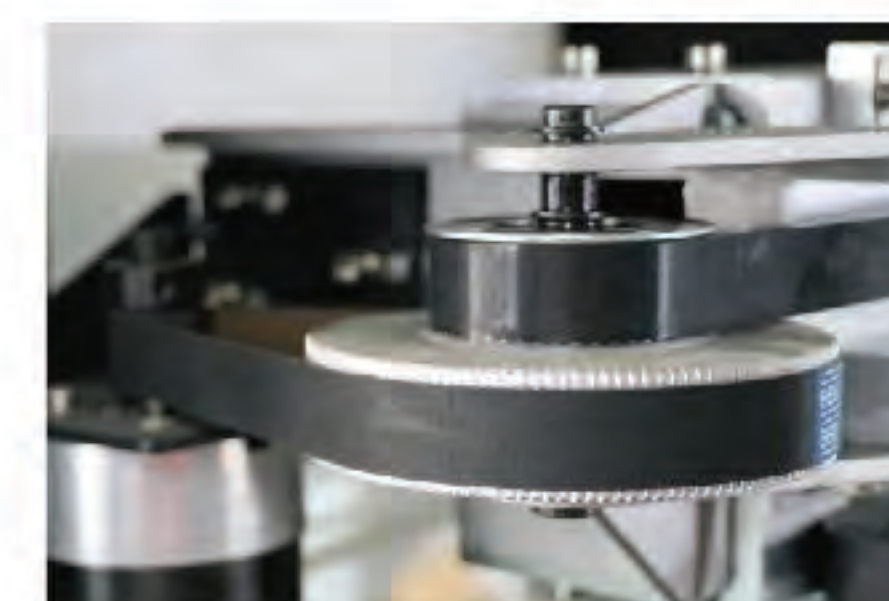


High-precision and high-stability tensioning pulley system.



The automatic cleaning assembly adds a single-way valve to increase the stability of the ink supply.

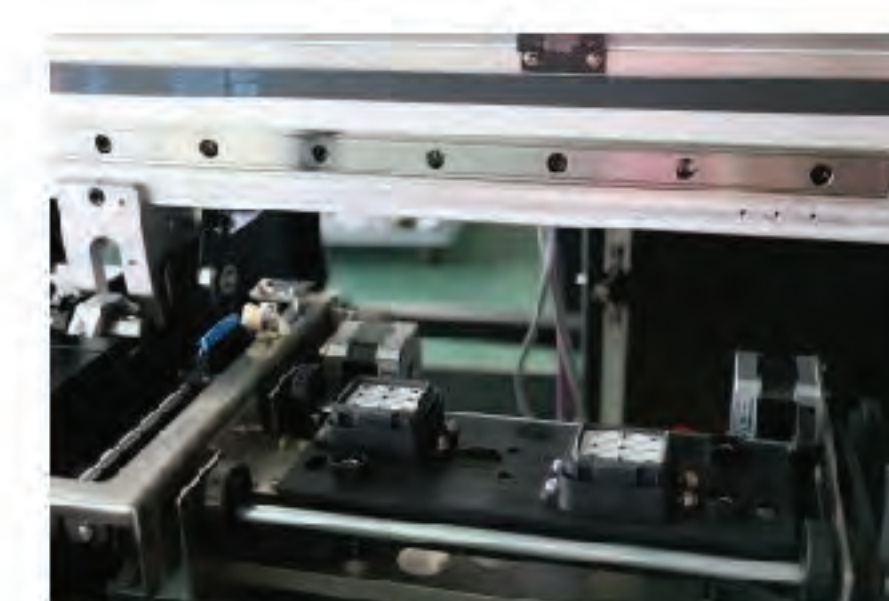

Automatic moisturizing cleaning assembly ensures the stability of head cleaning and improves working stability.

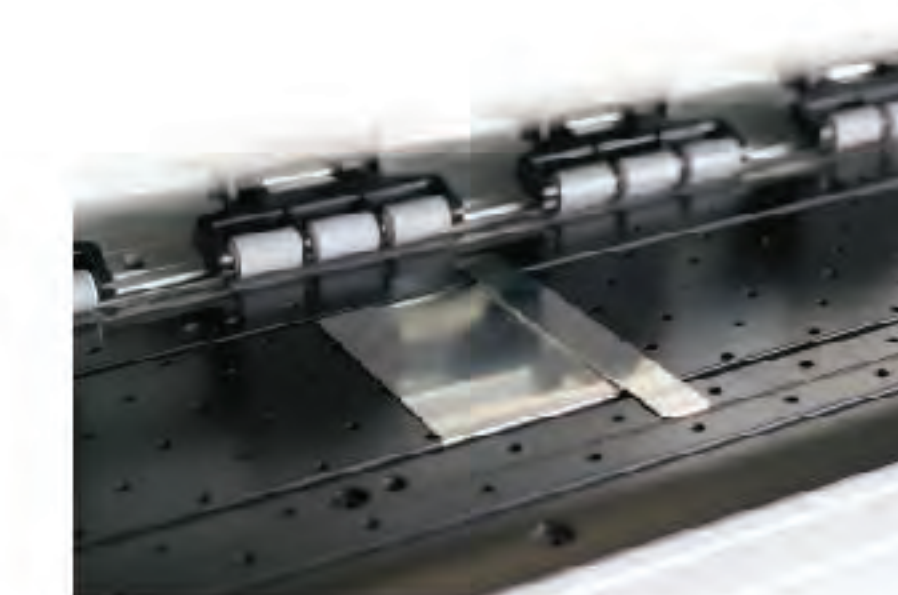

New pinch roller structure of three in group brings more stable feeding precision.



High quality DC servo motor with good stability and long life.



Infrared heater and cooling fan.



External power supply, intelligent rolling system